


FPCB Etching Carrier Tape

DEANTAPE No.7253C

Features

- The special adhesive does not peel or dislocate during work.
- Excellent in chemical resistance and wettability
- Suitable for FPCB Etching Process

Structure

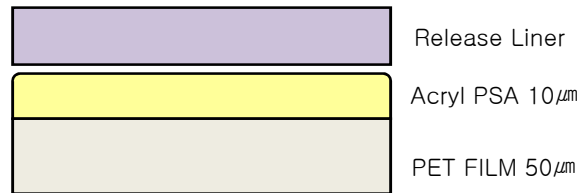

Properties

ITEM	UNIT	No. 7253C	REMARKS
Color	-	Transparent	
Type	Adhesive	Acrylic	
	Backing	PET	
	Liner	PET liner	
Thickness	μ m	60	Dial gauge (1/1000mm)
Adhesion Strength	$g_f / 25mm$ (Room Temp.)	10 ~ 20	[Pretreatment] Pressing 2kg roll twice(300mm/min) 180°, 300mm/min peel test
	$g_f / 25mm$ [Heat-Bar Pressing]	15~ 25	[Adherend] Poly Imide film [Heat Press] 180°C x 1hr, 4.5kgf/cm ²

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

DEANTAPE INC.